




# SFSP / MFSP / FSP Series

## Fine Grinder / Hammer Mill



We reserve the right to make technical changes without prior announcement. All rights reserved.  
 ©2020 HENAN SINOVO MACHINERY ENGINEERING CO., LTD.

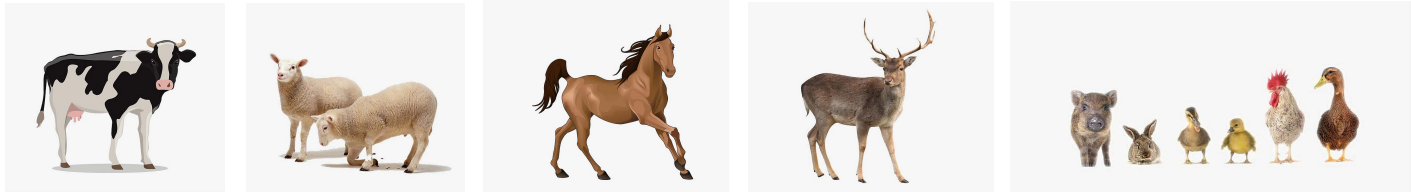

# FINE GRINDER

## SFSP Series

It is suitable for fine grinding in feed, grain, food, environmental protection industries and chemical industries

- ◆ Perfect appearance, stable and durable.
- ◆ Stationary blade structure: alloy steel stationary blade to adjust hammer space, can break the circulation layer effectively.
- ◆ Environmental protection silencer: the air supplement inside the grinding chamber, the air supplement port and door body are all equipped with silencer.
- ◆ New designed hammer: multi corner angle, multipoint cutting and grinding, thus grinding efficiency is given full play.
- ◆ Rotor structure: convenient to replace hammer, accurate positioning, time and energy saving.
- ◆ Cost effective: small sized multi-chamber screener is easy to replace.
- ◆ Can equip with iron and impurity removing feeder, classifying grader and air net system, to achieve better effect.





SFSP Series					
Model	SFSP 65/35	SFSP 65/60	SFSP 65/90	SFSP 65/120	SFSP 65/150
Main Motor Power (KW)	30/45	55/75	90/110	132/185	200/315
Capacity (t/h)	1.5~2.4	3~4	5~7	7.5~10	11~16
Remark: capacity standard : raw material is maize, sieve hole size $\varnothing$ 0.8mm					

# WATER DROP HAMMER MILL

## MFSP Series

It is suitable for fine grinding in feed, grain and food industries

- ◆ Rotor can run stably even the hammer wears out, the temperature of grinding chamber is lower;
- ◆ Convenient operation and lower noise;
- ◆ Design of grinding chamber is reasonable, sieving rate is higher;
- ◆ The improved screen hold-down mechanism makes replacement more convenient;
- ◆ Crude or fine grinding is achieved by adjusting the hammer-screen space, thus one machine can be used as two;
- ◆ Shift full opening operation door, maintenance and replacement of hammer are convenient

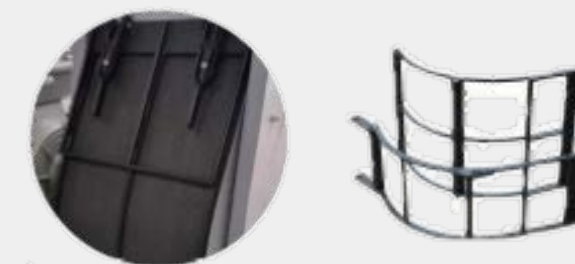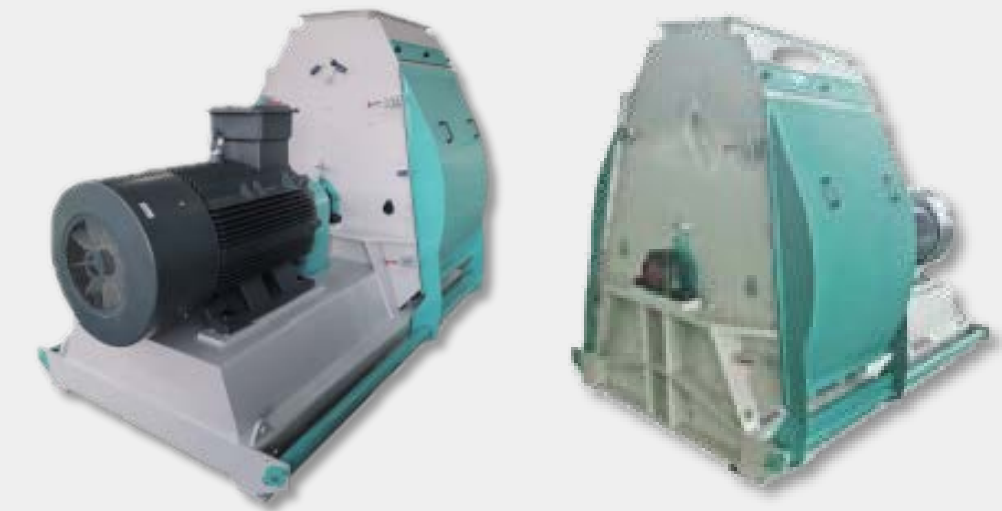


MFSP Series					
Model	MFSP 120/40	MFSP 120/50	MFSP 120/60	MFSP 120/80	MFSP 120/100
Main Motor Power (KW)	75/90	90/110	132/160	160/200	200/315
Capacity (t/h)	10.5~12.5	13~16	18~23	23~29	30~45
Remark: capacity standard: raw material is maize, sieve hole size $\varnothing$ 3.0mm					
Model	MFSP 138/40	MFSP 138/50	MFSP 138/60	MFSP 138/80	MFSP 138/100
Main Motor Power (KW)	75/90	90/110	132/160	160/200	200/315
Capacity (t/h)	8.5~10	10~13	14~17	18~23	24~35
Remark: capacity standard raw material is maize, sieve hole size $\varnothing$ 2.0mm					

# FORAGE MILL

## FSP Series

It is suitable for crude grinding in crop straw and flocks and herds feed industries

- ◆ Reasonable, durable and reliable structure, high capacity, easy installation and convenient operation;
- ◆ Pin coupling direct driving is adopted, with concealed wide rotor, running is stable, vibration is small and noise is low;
- ◆ Quick opening check door, split type thick screen. The screening area is large, useful life is long and it is convenient and quick to replace and clean;
- ◆ Side feeding is adopted in order to give full play to grinding efficiency, should choose feeder which can feed evenly and automatic control to cooperate with.

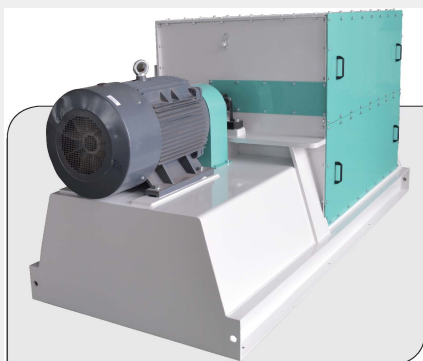

FSP Series				
Model	FSP 68/108	FSP 68/168	FSP 68/108*2	FSP 68/168*2
Main Motor Power (KW)	55/75	90/110	55*2	90*2
Capacity (t/h)	3~4	5~6	6~7	8~10


Remark: capacity standard: raw material is forage, sieve hole size  $\phi$ 50.0mm

# IMPELLER FEEDER

## TWLY Series

It is suitable to match with grinder and hammer mill.

- ◆ TWLY series impeller feeder is composed of intercross impellers, and with evenly feed;
- ◆ It is equipped with self-cleaning magnetic separator, which is convenient for cleaning iron. Variable frequency motor controls the quantity of feeding accurately;
- ◆ Impeller feeder can also work well with various kinds of hammer blade. It has the features of higher iron-removal efficiency, quick installation, easy operation, and etc.

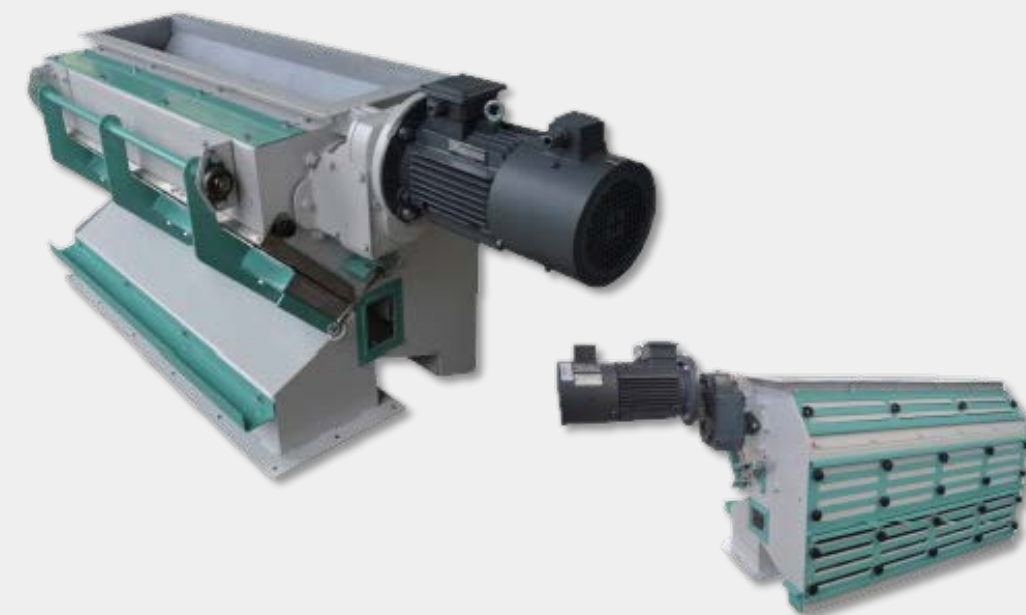

TWLY Series					
Model	TWLY - 1	TWLY - 2	TWLY - 3	TWLY - 4	TWLY - 5
Main Motor Power (KW)	1.5	1.5	2.2	2.2	2.2
Transportability (t/h)	10	13	20	26	33
Working Width (mm)	450	600	900	1200	1500

Remark: It can be customized based on the requirements of client.